


# Motori monofase serie MY in alluminio / Single phase motor MY series in aluminium

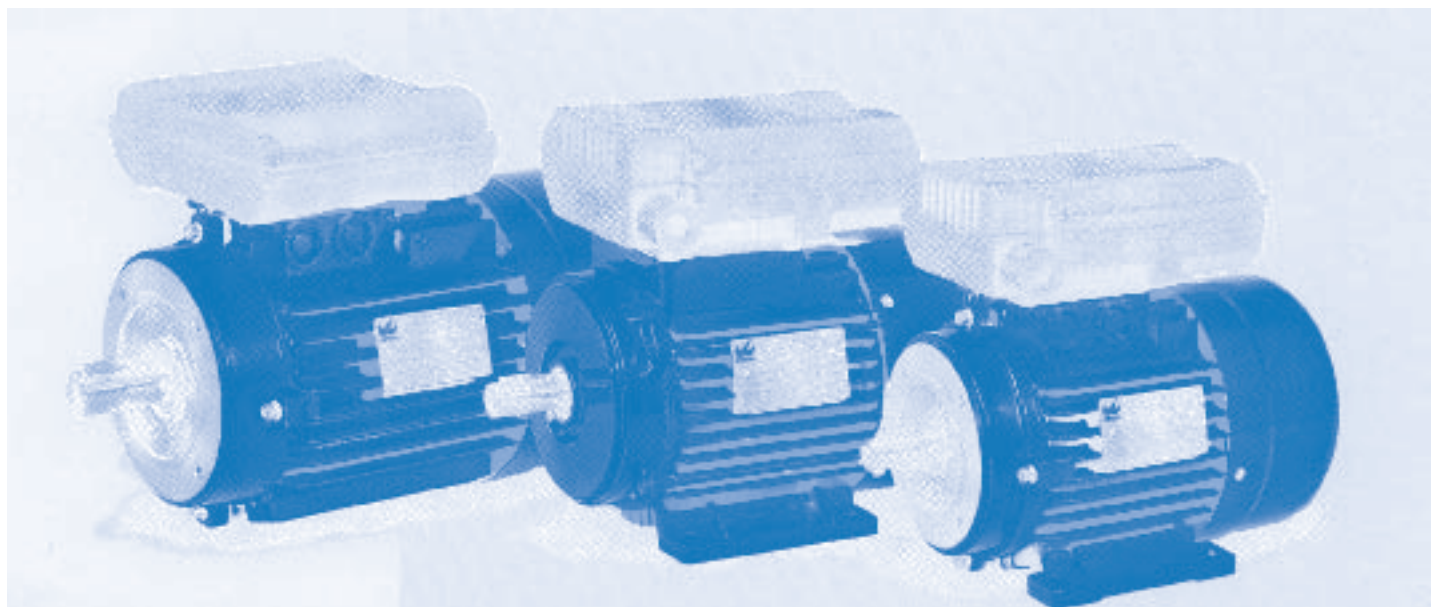

**MY**

Motor Type	Rated Output Power kW	Current	Rated Speed min <sup>-1</sup>	Full-load Power factor cosφ	Full-load Eff. η %	Locked Rotor Current Is/tn	Locked Rotor Torque M <sub>s</sub> /M <sub>n</sub>	Break Down Torque M <sub>k</sub> /M <sub>n</sub>	Starting Capacitor (250v) μ F	Net Weight kg
		220V A								
MY56A2	0.09	0.79	2730	0.92	56	3.2	0.5	1.7	6	3.2
MY56B2	0.12	0.99	2730	0.92	60	3.5	0.5	1.7	6	3.4
MY63A2	0.18	1.37	2740	0.92	65	3.7	0.4	1.7	6	3.9
MY63B2	0.25	1.87	2740	0.92	66	3.7	0.4	1.7	8	4.4
MY71A2	0.37	2.73	2750	0.92	67	3.7	0.35	1.7	12	6.2
MY71B2	0.55	3.88	2760	0.92	70	3.9	0.35	1.7	16	6.3
MY80A2	0.75	5.15	2780	0.92	72	3.9	0.33	1.7	30	8.3
MY80B2	1.10	7.02	2790	0.95	75	4.3	0.33	1.7	35	9.0
MY90S2	1.50	9.44	2800	0.95	76	4.8	0.30	1.7	40	13
MY90L2	2.20	13.7	2800	0.95	77	4.8	0.30	1.7	40	15
MY56A4	0.06	0.61	1330	0.90	50	3.3	0.45	1.7	6	3.2
MY56B4	0.09	0.87	1340	0.90	52	2.9	0.45	1.7	6	3.4
MY63A4	0.12	1.06	1350	0.90	57	3.2	0.40	1.7	6	4.0
MY63B4	0.18	1.54	1360	0.90	59	3.3	0.40	1.7	8	4.5
MY71A4	0.25	2.02	1370	0.92	61	3.4	0.35	1.7	12	6.1
MY71B4	0.37	2.95	1370	0.92	62	3.4	0.35	1.7	16	7.0
MY80A4	0.55	4.25	1380	0.92	64	3.5	0.35	1.7	25	9.5
MY80B4	0.75	5.45	1380	0.92	68	3.7	0.32	1.7	30	10
MY90S4	1.10	7.41	1390	0.95	71	4	0.32	1.7	40	13
MY90L4	1.50	9.83	1400	0.95	73	4.6	0.30	1.7	40	16